


EVOLUTION




Grado de protección: IP 66
Clase: II
Potencias: **250W - 400W**

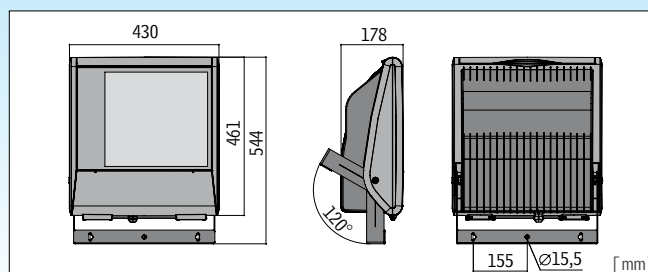

CÓDIGO Code	CABLEADO Wiring	POTENCIA Power(W)	TITULAR Lampholder	CORRIENTE Current(A)	DISPARADOR Trigger(KV)	RENDIMIENTO Execution	PESO NETO Net weight(Kg)	COLOR Light source	ENEC Colour
210003.101	NC		E40			NC	8,03	■	
210123.125	HPS-T/MH-T	250W	E40	3,00	4,50	CNR	11,17	■	✓
210123.140	HPS-T/MH-T	400W	E40	4,00	4,50	CNR	12,69	■	✓
210323.125	MH-T PH	250W	E40	2,15	1,00	CNR	10,19	■	✓
210323.140	MH-T PH	400W	E40	3,25	1,00	CNR	11,37	■	✓
210133.125	HPS-T	250W	E40	3,00	4,50	CNRL	11,39		✓
210133.140	HPS-T	400W	E40	4,00	4,50	CNRL	12,92		✓
210233.125	MH-T	250W	E40	3,00	4,50	CNRL	11,41		✓
210233.140	MH-T	400W	E40	4,00	4,50	CNRL	12,93		✓
210333.125	MH-T PH	250W	E40	2,15	1,00	CNRL	10,43		✓
210333.140	MH-T PH	400W	E40	3,25	1,00	CNRL	11,61		✓
212003.101	NC		E40			NC	8,04	■	
212123.125	HPS-T/MH-T	250W	E40	3,00	4,50	CNR	11,15	■	✓
212123.140	HPS-T/MH-T	400W	E40	4,00	4,50	CNR	12,77	■	✓
212323.125	MH-T PH	250W	E40	2,15	1,00	CNR	10,21	■	✓
212323.140	MH-T PH	400W	E40	3,25	1,00	CNR	11,36	■	✓
212133.125	HPS-T	250W	E40	3,00	4,50	CNRL	11,37		✓
212133.140	HPS-T	400W	E40	4,00	4,50	CNRL	13,00		✓
212233.125	MH-T	250W	E40	3,00	4,50	CNRL	11,39		✓
212233.140	MH-T	400W	E40	4,00	4,50	CNRL	13,01		✓
212333.125	MH-T PH	250W	E40	2,15	1,00	CNRL	10,45		✓
212333.140	MH-T PH	400W	E40	3,25	1,00	CNRL	11,60		✓
214003.101	NC		E40			NC	8,10	■	
214123.125	HPS-T/MH-T	250W	E40	3,00	4,50	CNR	11,25	■	✓
214123.140	HPS-T/MH-T	400W	E40	4,00	4,50	CNR	12,85	■	✓
214323.125	MH-T PH	250W	E40	2,15	1,00	CNR	10,35	■	✓
214323.140	MH-T PH	400W	E40	3,25	1,00	CNR	11,49	■	✓
214133.125	HPS-T	250W	E40	3,00	4,50	CNRL	11,47		✓
214133.140	HPS-T	400W	E40	4,00	4,50	CNRL	13,08		✓
214233.125	MH-T	250W	E40	3,00	4,50	CNRL	11,49		✓
214233.140	MH-T	400W	E40	4,00	4,50	CNRL	13,09		✓
214333.125	MH-T PH	250W	E40	2,15	1,00	CNRL	10,59		✓
214333.140	MH-T PH	400W	E40	3,25	1,00	CNRL	11,73		✓



retro | atrás



SM MH-T PH 400W E40